

Steel Kit Building #Custom

Pre galvanised cold rolled structure order / enquiry form.

steelkitbuildings.co.uk

Please complete & then check the details entered to avoid any errors.
An email with a current price will be sent once this form has been reviewed.

Lead times vary from 4 -6 weeks, current lead times are confirmed at the time of ordering.



1 - Standard Kit Option

- Building Specifications.

2 - Wall Openings

- Identify location for openings.

3 - Standard Cladding

- Colour choice for standard cladding.
Standard flashing colour.

4 - Custom Cladding

- Custom options for Snaplock® Seam on Kingspan QuadCore®Roofliner.

5 - Customer Details

- Name & contact info.
- Billing address
- Delivery Address
- Address to send samples.

6 -Additional Options

- Mezzanine Floor
- Suspended Ceiling



Steel Kit Building #Custom



Pre galvanised cold rolled construction designed in accordance with BS5950 part 5

Bay sizes Are Approximate and may vary - No steel included below FFL - All sizes inside cladding

Cold Rolled Portal Frame Design Frame Details

Length	Span (Width)	Eaves Height	Apex Height	Roof Pitch	Bays Long	Bays Wide

It is assumed that there are no restrictions on bracing and column positions
 All sections and door sizes are subject to frame calculations.
 All cold rolled steel is pre-hot dipped galvanised Steel, G275 coating with minimum yield strength of 390 N/mm²


Cladding & Rainwater System Elements

Wall Cladding	Roof Cladding	Roof Lights	Ridge & Eave fillers	Roof Sheet Lap Tape	Colorhead Screws	Roller Doors	Gutters & Downpipes
			Included	Included	Included		


All roller doors are considered non-dominant, sizes are dependant on position and frame calculations and need to be confirmed prior to order

Message

Steel Kit Building #Custom - Openings

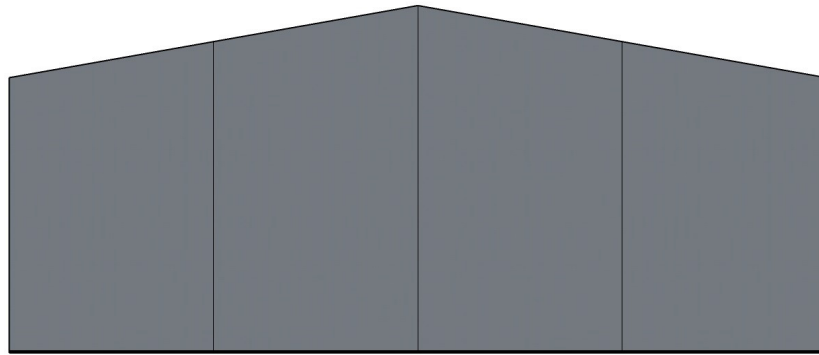

Left Gable

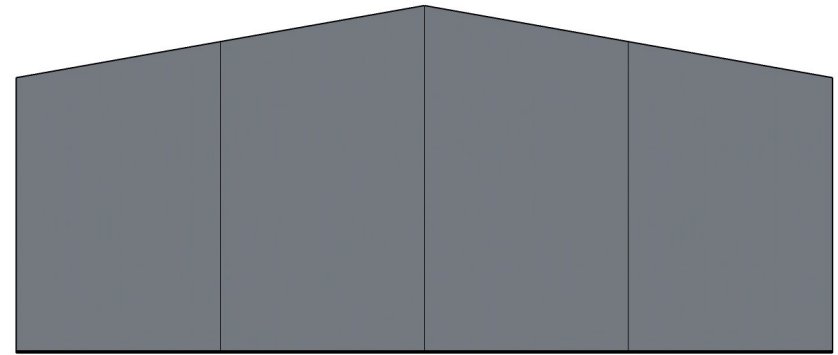

Right Gable

Front



Front

Right Gable

Left Gable



Rear

Rear

Elevation	Fire Wall	Block Wall	Open Bays	Fire Doors	Access Doors	Windows	Openings
Front							Use this page to mark which bays require openings. Add details & more info above or below
Rear							
Gable Left							
Gable Right							

Steel Kit Building #401806-10 – Roof Cladding



Standard colour options for Kingspan KS1000RW Roof Panels.

Select insulated core value

Goosewing Grey	Merlin Grey	Gull Grey	Anthracite	Olive Green	Grey White	Vandyke Brown	White	Juniper Green

Core Thickness (mm)	80	120	150
Overall Thickness (mm)	111	151	181
U-value (W/m²K)	0.25	0.16	0.14
Weight kg/m² 0.5/0.4 Steel	11.5	13.1	14.2

Goosewing Grey	Merlin Grey	Vandyke Brown	Juniper Green

Standard colour options
For 32/1000 single skin box profile roof sheets.

Goosewing Grey	Merlin Grey	Gull Grey	Anthracite	Olive Green	Grey White	Vandyke Brown	White	Juniper Green

Standard colour options
For roof flashings

Steel Kit Building #401806-10 – Wall Cladding

Standard colour options for Kingspan KS1000RW Wall Panels.

Select insulated core value

Goosewing Grey	Merlin Grey	Gull Grey	Anthracite	Olive Green	Grey White	Vandyke Brown	White	Juniper Green

Core Thickness (mm)	80	120	150
Overall Thickness (mm)	111	151	181
U-value (W/m²K)	0.25	0.16	0.14
Weight kg/m² 0.5/0.4 Steel	11.5	13.1	14.2

Goosewing Grey	Merlin Grey	Vandyke Brown	Juniper Green

Standard colour options
For 32/1000 single skin box profile wall sheets.

Goosewing Grey	Merlin Grey	Gull Grey	Anthracite	Olive Green	Grey White	Vandyke Brown	White	Juniper Green

Standard colour options
For wall flashings

Snaplock® Seam Roof on Kingspan QuadCore®Roofliner

Aluminium

Snaplock® Seam roof flashings are the same as the selected panel finish unless otherwise requested.

Zinc Patina	Dark Zinc Patina	Graphite	Anthracite	Copper Oxide	Copper Patina	Corten	Copper Metallic	Gold	Zinc Green	Zinc Blue	Zinc Red


Greencoat PLX Pural BT – Roofinox Stainless Steel – Aurubis Copper Nordic Standard

Nordic Night Black	Mountain Grey	Quarry Grey	Leaf Green	Metallic Gold	Stainless Steel	Copper

Profile Type

25mm x 425mm
38mm x 386mm

QuadCore®Roofliner			
Core Thickness (mm)	125	150	175
U-value (W/m²K)	0.15	0.12	0.10
Weight kg/m²0.7/0.5mm	15.4	16.4	17.4

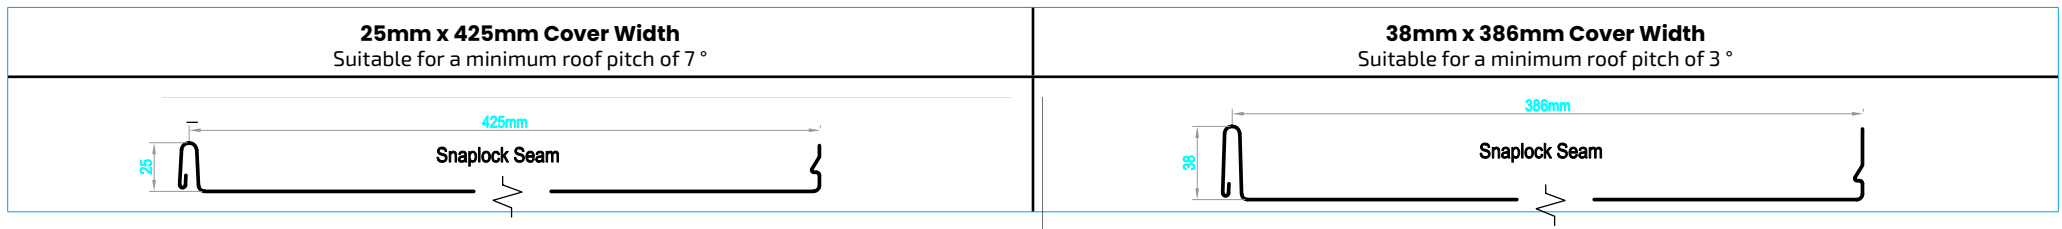

Snaplock® Seam Walls on Kingspan QuadCore®Roofliner

Aluminium

Snaplock® Seam roof flashings are the same as the selected panel finish unless otherwise requested.

Zinc Patina	Dark Zinc Patina	Graphite	Anthracite	Copper Oxide	Copper Patina	Corten	Copper Metallic	Gold	Zinc Green	Zinc Blue	Zinc Red


Greencoat PLX Pural BT – Roofinox Stainless Steel – Aurubis Copper Nordic Standard

Nordic Night Black	Mountain Grey	Quarry Grey	Leaf Green	Metallic Gold	Stainless Steel	Copper

Profile Type

25mm x 425mm
38mm x 386mm

QuadCore®Roofliner			
Core Thickness (mm)	100	125	150
U-value (W/m²K)	0.18	0.15	0.12
Weight kg/m²0.7/0.5mm	14.4	15.4	16.4

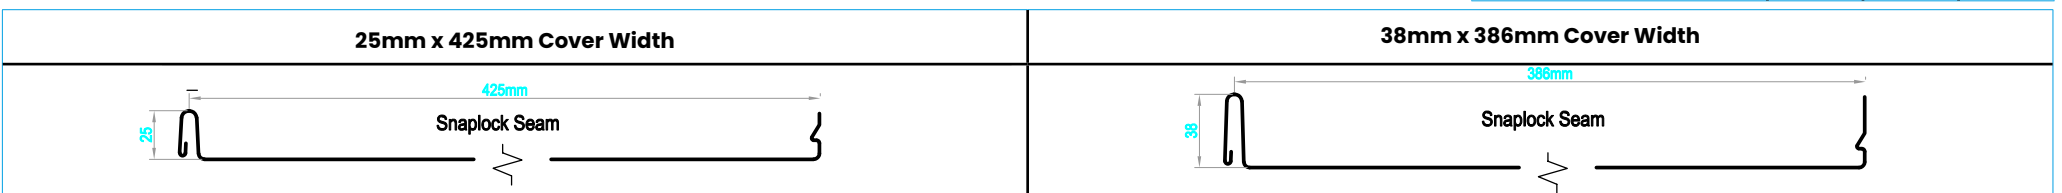

Steel Kit Building #Custom



Name	<input type="text"/>	Contact Number	<input type="text"/>	Email	<input type="text"/>
------	----------------------	----------------	----------------------	-------	----------------------

Company	<input type="text"/>	Site Contact Number	<input type="text"/>	Date Required	<input type="text"/>
---------	----------------------	---------------------	----------------------	---------------	----------------------

Planning Granted?	<input type="text"/>
-------------------	----------------------

Billing Address	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
Postcode	<input type="text"/>

Delivery Address	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
Postcode	<input type="text"/>

Samples Address	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
<input type="text"/>	
Postcode	<input type="text"/>

Notes Regarding Delivery

Ordering Information
After this form has been completed a quotation will be produced to reflect any requirements outlined in this form and sent to the email address provided on this page.
If accepted a contract will be sent for signing to accept the terms of sale.
An invoice will then be sent requesting a deposit of 50%.
Orders will become active once deposit funds have cleared.
3 weeks prior to delivery the final 50% payment will be requested & must be paid within 48 hours.
Orders will be delivered to the address entered on this page .
Lead times vary, an initial estimate is provided at the time of placing the order.
Deposits are non refundable, orders will be cancelled if the final payment is not made.
The full terms of sale are included in the contract, to be reviewed prior to signing.
Any quotations provided do not include ground-works of any kind, setting out drawings for the columns will be provided after the deposit has been received.
Samples of any selected metals for the roofing and cladding will be sent to aid order confirmation.
All openings, the location of, size of must be confirmed before the price of an order can be confirmed.
All kit buildings are sold with construction guide that will be provided after the deposit is received.

Please tick to confirm the details entered are correct.

Steel Kit Building #Custom



Mezzanine Floor

Suspended Ceiling

Mark the box if you required a mezzanine floor or suspended ceiling.

Enter as much information as possible in the area below.

Additional Options Information

Steel Kit Building #Custom - Office Only



Order Number		Order Date		Roof Drawings		Wall Drawings	
Price Verified		Processed By		Contract Signed		Lead Time	
Invoice Sent		Deposit Received		Final Payment Received		Delivered	

Order Notes